

*if you're looking
for an economical
and dependable*



PLUG VALVE


with
**LONG
CYCLE
LIFE**



**LOW TURNING
TORQUE**



**O-RING
SEALING**



**STRAIGHT
THROUGH
FLOW**

**175
PSI
PRESSURE
RATING**

**180°F
TEMPERATURE
RATING**

**FOR A WIDE
VARIETY OF
FLUIDS**

look at the
**MUELLER®
MARK
II
ORISEAL®**

OR

if you are looking for any of the 15,000 Mueller water and gas system products that can be designed to meet your specific requirements—write today for complete information or for individual product specifications, designs, delivery and prices. Your OEM inquiry will be given special attention.

serving the nation's utilities and industry for over 100 years.
MUELLER CO. / DECATUR, ILLINOIS

Factories at: Decatur, Chattanooga, Brea (Los Angeles) Mueller, Limited, Sarnia, Canada

Circle Service No. 60

DESIGN DATA

1965 Design Data Cross-Index

Issue	Date	Page
Amplifier, Turbulence, Curves	Mar. 3	76
Analyses of Single-Span Beams Partially Restrained at One Support	Jan. 6	74
Arc Beam, Cantilever, Part I	Nov. 24	132
Arc Beam, Cantilever, Part II	Dec. 8	114
Beam, Cantilever Arc, Part I	Nov. 24	132
Beam, Cantilever Arc, Part II	Dec. 8	114
Beams, Single-Span, Partially Restrained at One Support, Analyses of	Jan. 6	74
Cantilever Arc Beam, Part I	Nov. 24	132
Cantilever Arc Beam, Part II	Dec. 8	114
Casting, Steel, Glossary	Apr. 14	76
Chain Length Nomograms	May 12	86
Chart, Hydraulic Cylinder	Apr. 28	211
Chart, Solid Lubricant Disper- sion Selector	Apr. 28	208
Chord Length Nomogram	Sept. 1	52
Circular Plates, Large, De- flection of	Dec. 8	117
Circular Segment Nomogram	Apr. 28	214
Compound and Simple Pendulums	Nov. 24	135
Cone, Surface Area of a	Feb. 3	102
Cone, Wedge Cut from a	Oct. 13	87
Cube Roots, a Method of Ex- tracting Square Roots and	June 23	146
Curved Scale Nomograms	Sept. 15	106
Curved Spring Washers, Rate of	Nov. 10	100
Curves, Turbulence Amplifier	Mar. 3	76
Cylinder, Hydraulic, Chart	Apr. 28	211
Cylindrical Pressure Vessel Thickness	Aug. 4	46
Deflection, Elastomer, Nomo- gram	Aug. 18	122
Deflection, Large, of Circular Plates	Dec. 8	117
Design Properties for Thermo- setting Compounds	June 9	80
Dispersion, Solid Lubricant, Selection Chart	Apr. 28	208
Elastomer Deflection Nomogram	Aug. 18	122
Ellipse Perimeters	Mar. 3	78
Equally Spaced Loads (Beam)	Feb. 3	100
Equation, Quadratic, Nomograms	Mar. 17	102
Estimating Weights of Honey- comb Panel	Feb. 3	98

**For Free Reprints of the Above Article,
Circle K46 on Reader-Service Card**

A CREATIVE CHALLENGE TO PRODUCT DESIGNERS & ENGINEERS FROM...

REEVAIR*



magnified
60 times

Reevair is the microporous film that has the unusual property of keeping water out — yet allows the flow of gas, air or vapor. It may be likened to the tiny pores of your skin — waterproof, breathable, comfortable.

These properties applied to end uses are limited only by your imagination. Ideas that range from filtration and shoe linings to baby pants! Just a few are illustrated at the right.

Write for your free booklet that details the technical data of Reevair as it applies to many fabric constructions. Find out for yourself how Reevair can be applied to your specific product areas!

**SEND FOR
FREE
BOOKLET**



Reeves Brothers, Inc.

1071 Avenue of Americas • New York, N.Y. 10018

Gentlemen:

Please rush my FREE copy of the new Reevair booklet.

Name _____
Title _____
Company _____
City _____ State _____

**REEVES
VULCAN DIVISION**

*Reevair is a trademark of and is produced exclusively by
Reeves Brothers, Inc., 1071 Sixth Ave., New York 18.

Circle Service No. 137

*A few ideas
inspired by the
properties of
REEVAIR*



Issue	Date	Page
Flat Rectangular Plates, Stress in	May 26	138
Forming a Helicoid	May 26	148
Frequencies, Spring	Oct. 13	84
Gear Phasing	Oct. 27	143
Gear Trains, Multistage Planetary	June 23	138
Geneva Mechanisms	Sept. 29	140
Graphical Interpolation for Nomograms	Nov. 10	103
Helicoid, Forming a	May 26	148
Honeycomb Panel, Estimating Weights of	Feb. 3	98
Honeycomb Sandwich Structures	Mar. 31	108
Hydraulic Cylinder Chart	Apr. 28	211
Interpolation, Graphical, for Nomograms	Nov. 10	103
Large Deflection of Circular Plates	Dec. 8	117
Load-Deflecting Characteristics for Curved Washers	Nov. 10	100
Loads, Equally Spaced (Beam)	Feb. 3	100
Lubricants, Solid, Dispersion Selection Chart	Apr. 28	208
Mechanisms, Geneva	Sept. 29	140
Method of Extracting Square Roots and Cube Roots	June 23	146
Multistage Planetary Gear Trains	June 23	138
Nomogram, Chord Length	Sept. 1	52
Nomogram, Circular Segment	Apr. 28	214
Nomograms, Chain Length	May 12	86
Nomograms, Curved Scale	Sept. 15	106
Nomograms, Graphical Interpolation for	Nov. 10	103
Nomogram, Snap Ring	Sept. 15	110
Nomograms, Parallel-Line	Feb. 17	104
Nomograms for the Properties of the Sphere	July 21	134
Nomograms, V-Type	July 7	48
Panel, Honeycomb, Estimating Weights of	Feb. 3	98


(Continued on next page)

Are bronze castings "good enough" for your worm gear applications?

THEY ARE IF:

- Cost is no object and fluctuating tin prices are not troublesome.
- Service failures won't hurt your company's reputation.
- You have some economical way to salvage manufacturing rejects.
- Your customers never exceed your "service factors" and "rated loads"
- Your competitors haven't already switched to

MUELLER DYNALLOY FORGED BRONZE GEAR BLANKS



Speed reducer manufacturers can't afford to take chances with the materials that go into their products. Chances are you can't either. If we're right, call or write Gear Blank Division Manager Dick Kliemann for full information on DYNALLOY Forged Bronze Gear Blanks. His phone number is (313) 985-5111.



MUELLER BRASS CO. 1907 LAPEER AVE.
GEAR BLANK DIVISION (stock and custom-engineered DYNALLOY Forged Bronze Gear Blanks) PORT HURON, MICHIGAN 48061

453

Circle Service No. 138

Data Index . . . cont.

Issue	Date	Page
Parallel-Line Nomograms	Feb. 17	104
Pendulums, Simple and Compound . .	Nov. 24	135
Perimeters, Ellipse	Mar. 3	78
Phasing, Gear	Oct. 27	143
Pipes, Pressure Loss in	June 9	82
Pipes and Tubes, Relative Roughness of	Aug. 18	116
Planetary Gear Trains, Multi- stage	June 23	138
Plates, Circular, Large De- flection of	Dec. 8	117
Plates, Flat Rectangular, Stress in	May 26	138
Polygon, Regular, Properties of the	May 12	84
Pressure Loss in Pipes	June 9	82
Pressure Vessel Design	Jan. 20	138
Pressure Vessel Thickness, Cylindrical	Aug. 4	46
Properties of the Regular Poly- gon	May 12	84
Properties of the Sphere, Nomo- grams for the	July 21	134
Quadratic Equation Nomograms	Mar. 17	102
Rate of Curved Spring Washers	Nov. 10	100
Rectangular Plates, Flat, Stress in	May 26	138
Relative Roughness of Pipes and Tubes	Aug. 18	116
Resonant Frequencies, Spring	Oct. 13	84
Ring, Snap, Nomogram	Sept. 15	110
Sandwich Structures, Honeycomb . . .	Mar. 31	108
Scale, Curved, Nomogram	Sept. 15	106
Segment, Circular, Nomogram	Apr. 28	214
Simple and Compound Pendulums . .	Nov. 24	135
Slide-Rule Operations	May 26	141
Snap Ring Nomogram	Sept. 15	110
Solid Lubricant Dispersion Se- lection Chart	Apr. 28	208
Sphere, Nomograms for the Prop- erties of the	July 21	134
Spherical Wedges	Sept. 29	146
Spring Frequencies	Oct. 13	84
Spring Washers, Curved, Rate of . . .	Nov. 10	100
Square Roots and Cube Roots, a Method of Extracting	June 23	146
Steel Casting Glossary	Apr. 14	76
Stress in Flat Rectangular Plates	May 26	138

For Free Reprints of the Above Article,
Circle K46 on Reader Service Card.


NEW INVISIBLE HINGES

General Purpose Hinge Creates Flush Surfaces

These hinges are completely hidden from view when door, lid or hood is closed. Makes possible flush, absolutely smooth surfaces that greatly enhance appearance and safety. Tapered body sections are precision castings of a special zinc base alloy having a tensile strength of 47,000 pounds per square inch. Operates in a 180 degree arc which permits full opening. Laminated link construction reduces friction and permits hinges to operate freely and smoothly. Hinges are reversible and may be used right or left hand. Available for wood or metal application in a wide variety of sizes.

SOSS MANUFACTURING COMPANY, Dept. EDN-1, P. O. Box 38, Harper Station, Detroit 13, Michigan.

Circle Service No. 141




Design News



**PREFERRED BY
MORE DESIGN
ENGINEERS IN
THE OEM.....**

Issue	Date	Page
Structural Vibration Testing	Oct. 27	140
Surface Area of a Cone	Feb. 3	102
Testing, Vibration, Structural	Oct. 27	140
Thermosetting Compounds, Design Properties for	June 9	80
Tubes, Relative Roughness of Pipes and	Aug. 18	116
Tubing and Solid Shafts of Equal Moment of Inertia	July 21	132
Turbulence Amplifier Curves	Mar. 3	76
Vibration Testing, Structural	Oct. 27	140
V-Type Nomograms	July 7	48
Washers, Curved, Load-Deflecting Characteristics for	Nov. 10	100
Wedge Cut from a Cone	Oct. 13	87
Wedges, Spherical	Sept. 29	146
Weights of Honeycomb Panel, Estimating	Feb. 3	98

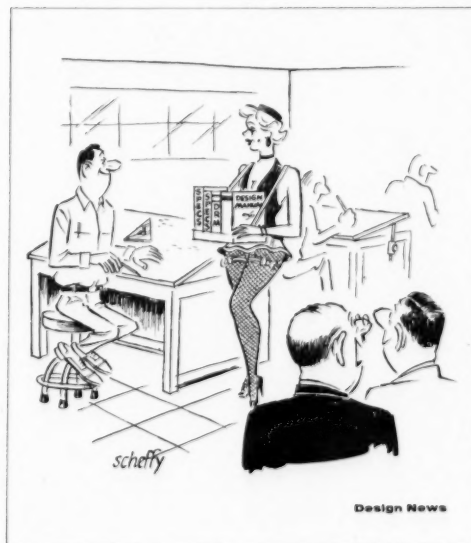

"How's that for easy reference?"

All turret cases are not alike..



Only Marsh offers gauges with Cono-weld process, Mastergauge enduring accuracy, "easy read" dials, twin tip pointers, blow out plugs—and an exclusive recalibrator that adjusts by correcting the basic error. *Not by merely moving the pointer.* Finish on the high impact phenol case is better, too. Smooth, no-glare satin black for smooth, easy painting. For complete information, ask your man from Marsh or contact us direct.


MARSH

Marsh Instrument Co., Dept. 38125, Skokie, Ill.
Division of Colorado Oil and Gas Corporation

Specifications:
Sizes 4-1/2" and 6".
For Mastergauges,
Master Test Gauges,
Hydraulic Quality Gauges
and dial thermometers.
Bottom or back outlet.
Blow out plug is standard
in Mastergauges.
Available in others.

Circle Service No. 122

LIGHT FORCE Cherry Switch

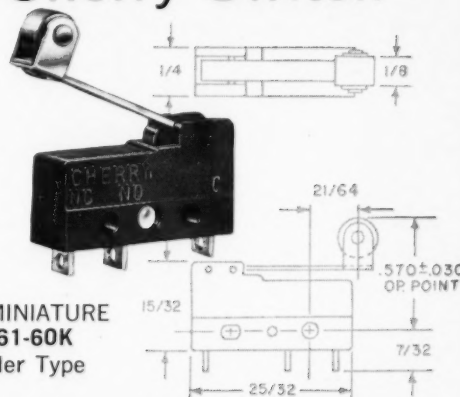

- Operating Force 9 grams Max.
- 5 amp, 125-250 V AC



The complete snap-action switch line!



Cherry Electrical Products Corporation

P.O. Box 437-6 Highland Park, Ill.
In Canada: Barry Electric Ltd., Rexdale, Ontario
Circle Service No. 123